


The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights, including but not limited to, patent, trademark, copyright, etc. are strictly prohibited without prior written consent from CONNPLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/22/23'		

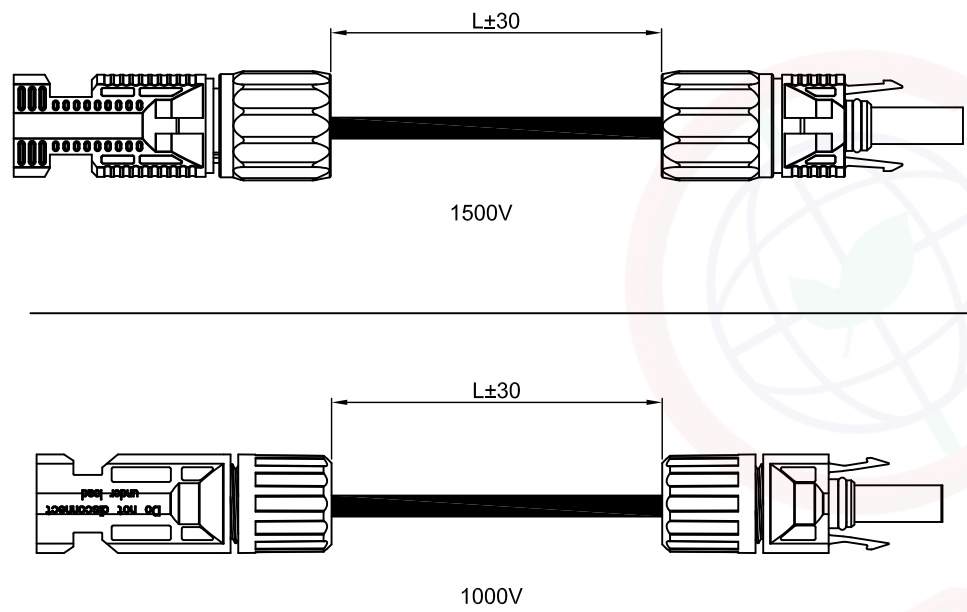

Notes:  
 Specifications:  
 1. Contact Resistance: 0.5Ω Max.  
 2. Voltage Rating: 1000V or 1500V.  
 3. Temperature: -40°C~+90°C.  
 Materials:  
 1. Insulating material: Thermoplastic Black.  
 2. Contact material: Red Copper, Tin plated.  
 Product Number Code:  
 DS1195-01 - X X X X X X X

- Cable size
- A: 4.0mm<sup>2</sup>
- B: 6.0mm<sup>2</sup>
- Voltage type
- H: 1500V
- L: 1000V(For 4.0mm<sup>2</sup> Only)
- Wire length(Dim L)
- 0300: 300mm
- .....
- Cable color
- B: Black
- R: Red
- Contact plating
- 6: Tin
- Housing color
- B: Black
- No. of contacts
- 1T1: 1Female+1Male




(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PV Cable Assemblies Extension Cable					
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	SERIES				
.X	±0.38	.X	±3°			DS1195-01 SERIES						
.XX	±0.25	.XX	±2°									
DRAWING TYPE		CUSTOMER		<b>晨翔电子有限公司</b> <b>CONNPLY CONNPLY ELECTRONIC CO. LTD</b>								
SCALE		1:1							SHEET		1 OF 2	
DRAWING NO.		C-DS1195-01-XXXXX-A										

1                      2                      3                      4                      5                      6                      7                      8

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are strictly reserved. CONNPLY is strictly prohibited without prior written consent from CONNPLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

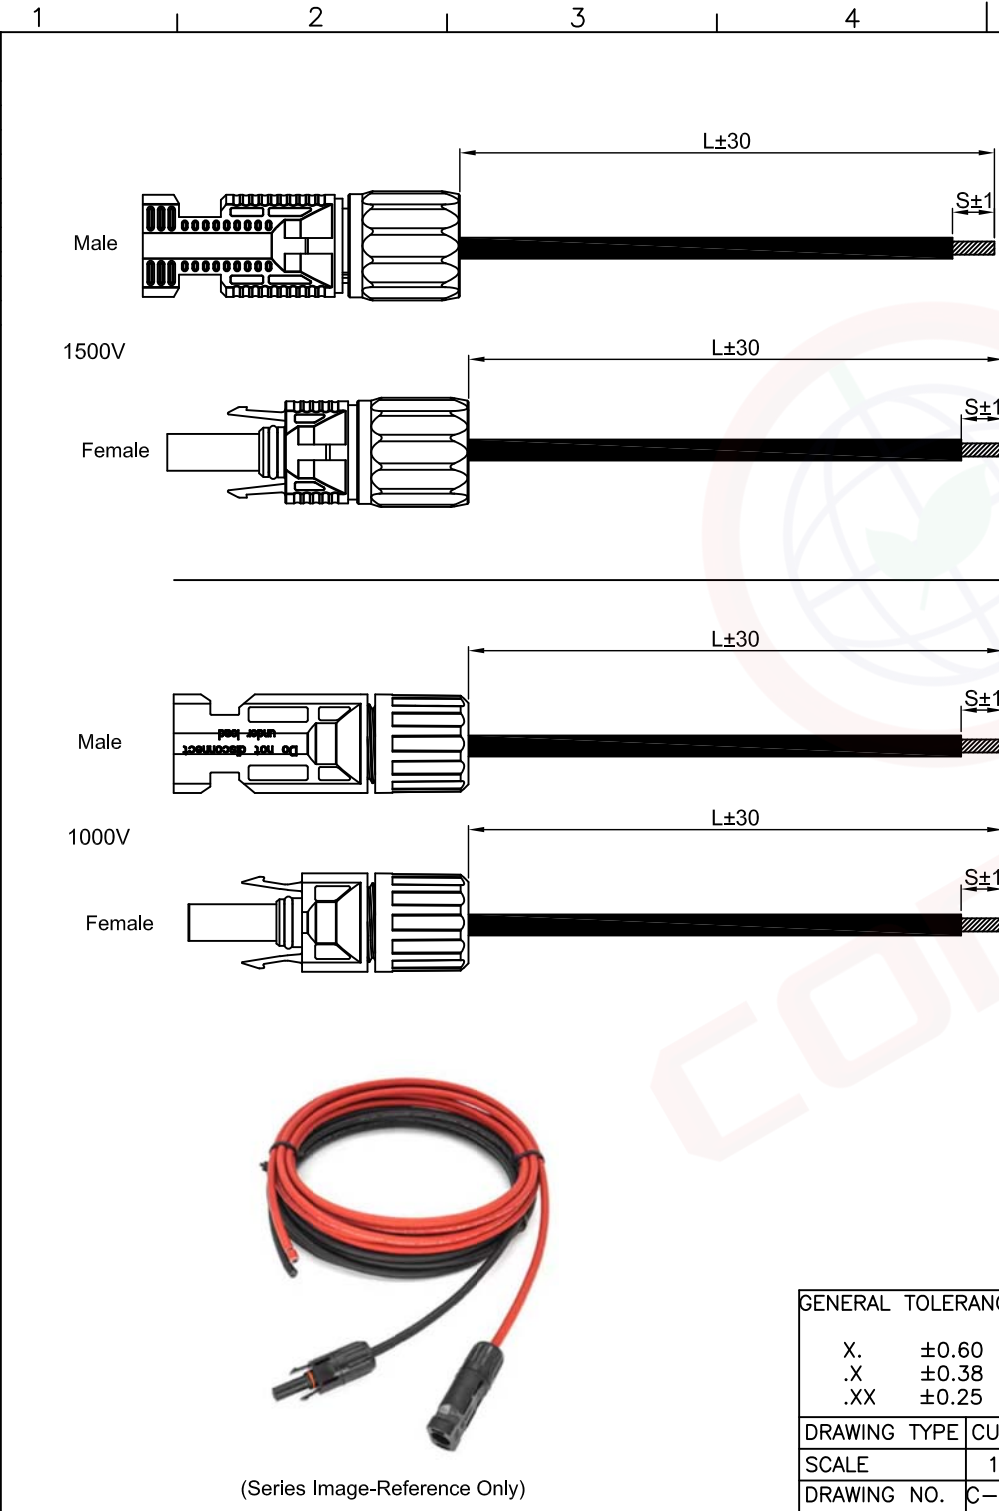

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/22/23'		

Notes:


Specifications:

- Contact Resistance: 0.5Ω Max.
- Voltage Rating: 1000V AC rms.
- Temperature: -40°C~+90°C.
- Strong UV resistance, long-term exposure to sunlight without aging

Materials:

- Insulating material: Thermoplastic Black.
- Contact material: Red Copper, Tin plated.

Product Number Code:  
 DS1195-01 - X X X X X X X X

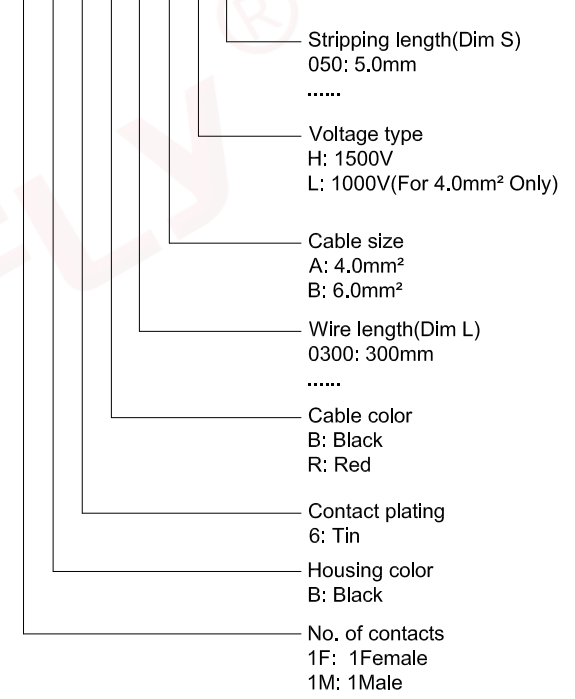

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PV Cable Assemblies Extension Cable	
X.	±0.60	X.	±5°	UNITS	mm	SHEET	A4	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1195-01 SERIES	
.XX	±0.25	.XX	±2°			<b>晨翔电子有限公司</b> <b>CONNPLY CONNPLY ELECTRONIC CO. LTD</b>		
DRAWING TYPE		CUSTOMER						
SCALE		1:1		SHEET		2 OF 2		
DRAWING NO.		C-DS1195-01-XXXXX-A						