
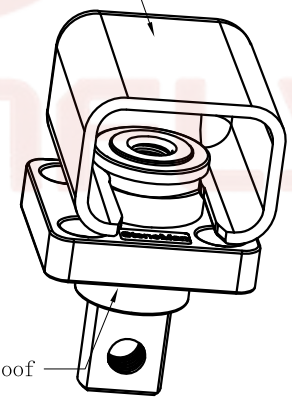
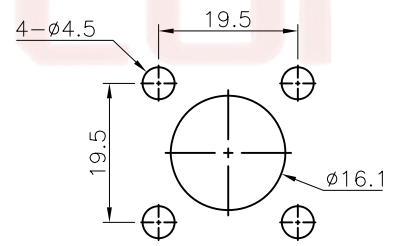
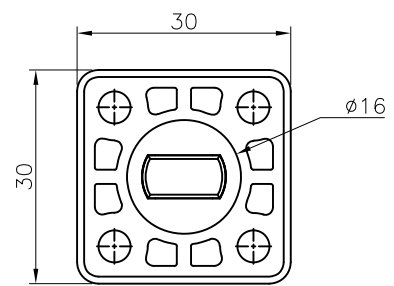




The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/13/26'		

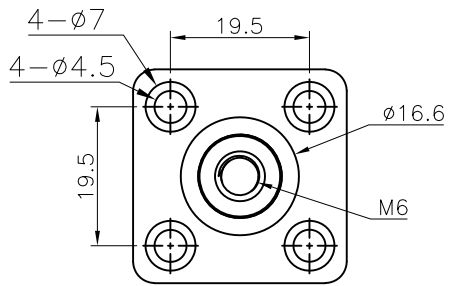

(Series Image-Reference Only)

NOTES:
 Rated voltage:600V
 Rated current:120A.
 Contact Barrel Wire Size:6AWG~4AWG
 Temp. Range:-40° C~+125° C.
 Materials:
 Contact: Brass, Nickel plated.
 Insulator: PA66.
 Product Number Code:
 DS1208-01 - X X X X X

- Screw type:
W:W/Screw
X:W/O Screw
- Contact plating:
N:Nickel
- Housing color:
B:Black
R:Red
- Connector type:
F:Female
- Rated current:
120:120A



M6 screws







GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		120A WALL (T-SHAPED) WIRING TERMINAL
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	
DRAWING TYPE		CUSTOMER		SHEET	SERIES
SCALE		1:1	SHEET	1 OF 2	DS1208-01 SERIES
DRAWING NO.		C-DS1208-01-XXXXX-A			

1 2 3 4 5 6 7 8

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/13/26'		

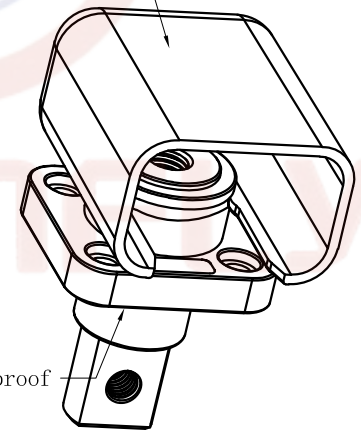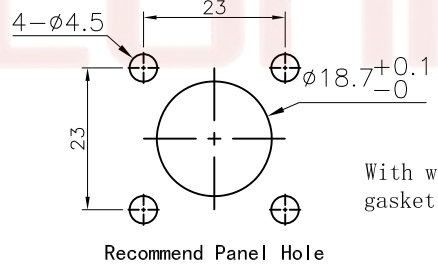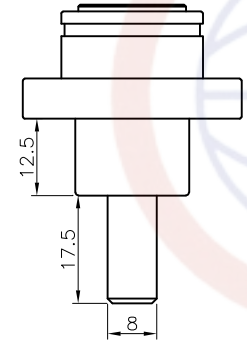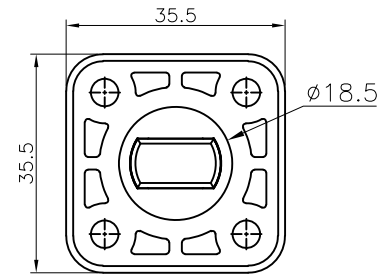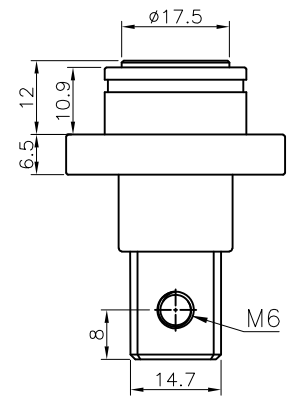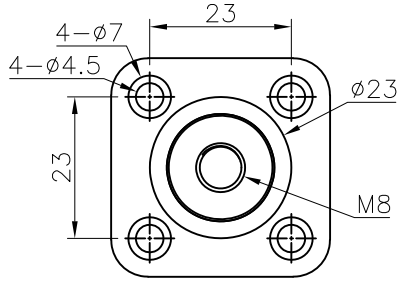

(Series Image-Reference Only)

NOTES:
 Rated voltage:600V
 Rated current:200A.
 Contact Barrel Wire Size:6AWG~1/OAWG
 Temp. Range:-40° C~+125° C.
 Materials:
 Contact: Brass,Nickel plated.
 Insulator: PA66.
 Product Number Code:
 DS1208-01 - X X X X X

Screw type:
 W:W/Screw
 X:W/O Screw
 Contact plating:
 N:Nickel
 Housing color:
 B:Black
 R:Red
 Connector type:
 F:Female
 Rated current:
 200:200A



GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	2 OF 2
DRAWING NO.	C-DS1208-01-XXXXX-A		

PROJECTION	TITLE
	200A WALL (T-SHAPED) WIRING TERMINAL
UNITS	mm
SHEET SIZE	A4
SERIES	DS1208-01 SERIES

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8